



מדינת ישראל  
STATE OF ISRAEL

REC'D 30 SEP 2003	
WIPO	PCT

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים


This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
of which particulars are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזה העתקים  
נכונים של המסמכים  
שהופקדו לכתחילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

BEST AVAILABLE COPY

# PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

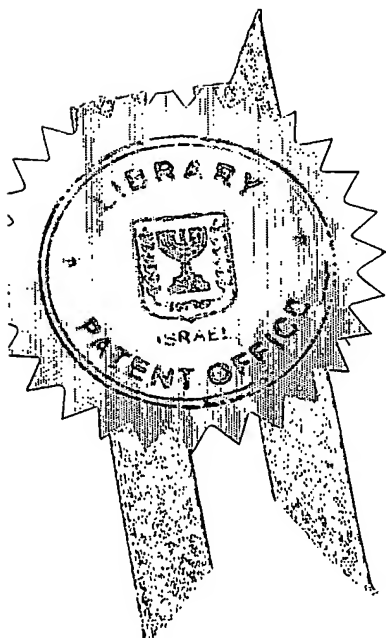

This 18-08-2003 היום  
במונה על הזוהרים  
רשם הפטנטים  
Commissioner of Patents

נתאשר  
Certified

לשימוש הלישכה  
For Office Use

מספר: Number	151342
תאריך: Date	19-08-2002
הוקדם/נדחה Ante/Post-Dated	

חוק הפטנטים, תשכ"ז-1967  
Patent Law, 5727 - 1967  
ב ק ש ה ל פ ט נ ת  
Application for Patent

I, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)  
(Name and address of applicant, and in case of body corporate-place of incorporation)  
Lycored Natural Products Industries Ltd.  
P.O.Box 320  
Beer Sheva 84102  
ליקורד תעשיות מוצרים טבעיים  
בע"מ  
ת.ד. 320  
באר שבע 84102

ששמה הוא L A W ה ד י ן בעל ההמצאה מכח  
Owner, by virtue of an invention the title of which is

תהליך תעשיתי לעיבוד עגבניות ומוצרים המתקבלים מכך  
(בעברית)  
(Hebrew)

INDUSTRIAL TOMATO PROCESS AND PRODUCTS OBTAINED  
THEREOF

(באנגלית)  
(English)

hereby apply for a patent to be granted to me in respect thereof

מבקש בזאת כי ינתן לי עליה פטנט

*בקשת חלוקה - Application of Division		*בקשת פטנט מוסף - Application for Patent Addition		*דרישה דין קדימה Priority Claim		
*מבקשת פטנט from Application מס' _____ dated _____		*לבקשה/לפטנט to Patent/Apl. מס' _____ dated _____		מספר/סימן Number/Mark	תאריך Date	מדינת האגוד Convention Country
*יפוי כח: כללי / מיוחד - רצוף / בזה - ענף יוגש P.O.A.: general / individual - attached / to be filed later הוגש בענין _____ ס.מ. 136299 _____ filed in case						
המען למסירת מסמכים בישראל Address for Service in Israel נעם מושקין מחלקת קניין רוחני ת.ד. 60 באר שבע 84100 מספרנו: 6.086(IL)						
Signature of Applicant				היום 19 בחודש 8 שנה 2002 This of the year of		
NOAM MUSHKIN By: <u>Noam Mushkin</u> Attorney for Applicant				לשימוש הלישכה		

טופס זה כשהוא מוטבע כחותם לישיבת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
this form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

Delete whatever is inapplicable מחק את המיותר \*

Ref: 6.086 (IL)

תהליך תעשיתי לעיבוד עגבניות ומוצרים המתקבלים מכך

**INDUSTRIAL TOMATO PROCESS AND PRODUCTS OBTAINED THEREOF**

**Industrial Tomato Process and Product Obtained Thereof****Field of the Invention**

The present invention relates to the field of tomato processing and products thereof.

5 Particularly to a process for obtaining tomato pulp and tomato concentrate.

**Background of the Invention**

One of the major products of the tomato processing industry is tomato concentrate.

10 Tomato concentrate has a Standard of Identity. The two outstanding properties of tomato concentrate which are monitored and controlled are: a) the Brix of the concentrate, wherein the Brix is a measure of concentration. The concentration, expressed as "total soluble-solids" or in units of Brix that represents the percentage of soluble solids in the liquid phase, or more accurately defined as the measure of the total soluble solids, expressed as if they were sucrose, measured by means of a refractometer.

15 b) Viscosity. The viscosity can be measured by a Bostwick consistometer. Tanglertpaibul and Rao (*Journal of Food Science* (1987) Vol. 52, No.2) teach of the influence of pulp content on the flow properties and viscosity of concentrates. The viscosity of tomato juice and tomato concentrate which is obtained thereof is also dependent upon whether a "hot break" or "cold break" method is employed in the  
20 process of the preparation of tomato juice. In processing the tomatoes, crushing and macerating allows for the pectolitic enzymes in the tomato to be released from the fruit cells and come in contact with the pectin in the tomato and break it down. Since the pectin is responsible for the consistency of the tomato juice, breaking down the pectin, the breakdown of the pectin results in lowering of the viscosity of the resultant tomato  
25 juice. In the "hot break" break method, the macerated tomatoes are heated to a temperature which deactivates the pectolitic enzymes, hence preventing the breakdown of pectin. Tomato juice prepared by the "hot break" method exhibits a higher viscosity, and it is generally accepted that said juice and tomato concentrate prepared thereof is of better quality than the same products prepared from the "cold break" method.

30

The preparation of concentrates is generally conducted by evaporating water from tomato juice. Gould (*Tomato Production Processing & Technology*, third edition, p.

201-217, CTH Publications Inc.) describes a standard process for preparing tomato juice which includes sorting and trimming fresh tomatoes to remove stems or unripe portions of the tomato, chopping and crushing, heating and extraction. The term extraction as employed by Gould is also known in the industry as "finishing" (see Tanglertpaibul and Rao). Extraction or finishing comprises of passing the crushed tomatoes through a fine screen. The tomato juice thus obtained is then concentrated by evaporating water from the tomato juice until the desired concentration expressed in Brix is reached. The Brix value of concentrate is controlled by the amount of water evaporated. However, according to the prior art methods for preparing tomato concentrate the viscosity of the tomato concentrate is a function of soluble solids concentrate expressed as the Brix value. Hence, controlling the Brix of the concentrate will also influence the viscosity. Tanglertpaibul and Rao teach that the viscosity may be controlled by varying the pulp and serum content in tomato concentrate by adding concentrated serum or pulp to tomato concentrate. However, their method is not practical for conducting on an industrial scale, since it requires a source of pulp and serum, both of which are valuable components of other tomato products which are not readily available, and thus their method would not be financially sound. Furthermore, the mixing of serum or pulp into tomato concentrate on an industrial scale presents technical difficulties due to the viscosity of the concentrate.

Accordingly, there is a long felt need for an industrial scale process for preparing tomato concentrate, wherein the viscosity of the concentrate may be controlled.

It is therefore an objective of the present invention to provide a process for obtaining tomato concentrate wherein the viscosity of the tomato concentrate may be controlled during the process.

It is another objective of the present invention to provide a process for obtaining tomato pulp, a versatile tomato ingredient, wherein said tomato pulp has improved properties.

A further objective of the present invention is to provide a method for controlling the viscosity of tomato concentrate and tomato juice.

A further objective of the present invention is to provide a method for preparing tomato concentrate of 30° Brix with more tomato flavor without effecting its viscosity.

- 5 It is yet a further objective of the present invention to overcome the shortcoming of the prior art methods.

Other objectives of the invention will become apparent as the description proceeds.

10 **Summary of the Invention**

The present invention provides an industrial process for obtaining tomato pulp and tomato concentrate from tomato juice, said process comprising of the following steps:

- 15       a) separating the tomato juice to two parts,  
      b) one part containing up to 20% of the total tomato juice is separated into pulp and serum,  
      c) the serum obtained from step b) is added to the second part of the juice which is further concentrated to obtain tomato concentrate.

20 The present invention further provides a method for controlling the viscosity and lycopene content of tomato concentrate or tomato juice by removing a portion of the pulp from the tomato juice. Wherein tomato concentrate is obtained by the process, the part of the pulp which is separated from the juice is separated before concentrating the tomato juice to tomato concentrate.

- 25 Further provided by the present invention is tomato pulp ((also referred to as pulp composition) of a particle size not greater than 1.5 mm which does not contain seeds or peels and has a lycopene concentration which is 5 to 15 folds higher than the lycopene concentration in the tomatoes from which said pulp is obtained, wherein said pulp when dried has a high water absorbency capacity ratio. Said ratio of dried pulp:water is greater  
30 than 1:13 and can reach up to 1:25.

According to a further aspect of the present invention the composition of the present invention which has a high concentration of lycopene and a very weak tomato taste, may be used as a colorant, particularly, as a colorant for food and edible products.

- 5 A further aspect of the present invention provides for the use of the pulp composition as starting material for obtaining tomato oleoresin and lycopene.

### Description of the Drawings

Fig. I – Flow chart of the process for obtaining tomato concentrate and tomato pulp.

10

### Detailed Description of a Preferred Embodiment of the Invention

The following description is illustrative of embodiments of the invention. The following description is not to be construed as limiting, it being understood that the skilled person may carry out many obvious variations to the invention.

15

Throughout the description, percentages of components are by weight, and measures are metric unless specifically noted differently. The term "tomato pulp" refers to the portion of the tomato which contains the water insoluble tomato solids (about 1% from the tomato weight), wherein said pulp contains about 92-75% serum. Serum being the liquid portion of the tomato which contains most of the water soluble components of the tomato.

20

The process of the present invention while described as a continuous process may be conducted as a batch process.

25

The known practices of the preparation of tomato concentrate is by the evaporation of water from tomato juice. Tomato juice contains about 10% pulp which contains about 75%-95% serum. It has now been surprisingly found that removing up to about 20% of the total pulp from tomato juice before concentrating the tomato juice, does not adversely effect the properties of the tomato concentrate obtained thereby or the properties of the modified tomato juice, wherein, the percentage of pulp removed

30

depends on the nature and composition of the raw tomatoes employed in the process. Furthermore, it has surprisingly been discovered that the pulp obtained from tomato juice has improved properties, said properties relating to water absorption capacity of the dried pulp.

5

According to a particular embodiment of the present invention described with reference to Fig. 1, tomato juice obtained by processes known in the prior art is separated to two parts [Fig. 1, (I)]. One part which is not more than 20%, preferably not more than 15 % of the total tomato juice is separated [Fig. 1, (II)] to pulp [Fig. 1, (III)] and serum [Fig. 1, (IV)]. Said separation is preferably conducted according to the process described in 10 U.S. 5,837,311 which is incorporated herein by reference. U.S. 5,837,311 describes a process for obtaining tomato oleoresin from tomatoes which are separated to serum and pulp. Other standard methods of separation as appreciated by the skilled artisan may also be suitable for the purposes of the present invention, e.g. decantation. The serum is 15 then added to the second portion of the tomato juice [Fig. 1, (V)] to obtain modified tomato juice which is subsequently concentrated [Fig. 1, (VI)] by evaporating water from the modified juice, providing tomato concentrate [Fig. 1, (VII)]. Unexpectedly, it has been found that adding the serum to the juice before concentrating the modified juice, facilitates the concentrating stage. This further allows to overcome the technical 20 difficulties associated with mixing tomato concentrate with serum or pulp as conducted in the prior art., and also has advantages in terms of energy efficiency.

According to a particular embodiment of the present process, the modified tomato juice is a final product which meets the standards of tomato juice. Both the modified tomato 25 juice and tomato concentrate obtained according to the present process will have a stronger tomato flavor, than tomato juice or concentrate obtained by the prior art methods.

The amount of pulp which is separated from the tomato juice is determined with respect 30 to the desired viscosity and lycopene concentration which can effect the a/b ratio as tested by Hunter tristimulus colorimeter which indicates the color value of the final

product, i.e. tomato concentrate or modified tomato juice. The amount of pulp removed from the juice varies due to differences in the nature and composition of the tomatoes employed in the process. This must be determined empirically in accordance to the quality (composition) of the raw tomatoes which are used for the process. Hence, the viscosity of a sample of the final product is tested. If the viscosity is higher than the desired value, then the percentage of pulp removed may be increased. In the event that the viscosity is lower than the desired value than the percent of pulp removed should be decreased. The amount of pulp removed is always maintained so that the standards for tomato juice or tomato concentrate are adhered to.

10

It is noteworthy that since the lycopene is predominantly in the pulp part of the tomato, the lycopene concentration in the final tomato product, i.e. tomato concentrate or tomato juice is directly proportional to the amount of pulp removed from the tomato juice. Accordingly, the viscosity and lycopene concentration of the tomato product are dependent upon the amount of pulp separated from the tomato juice.

15

According to a preferred embodiment of the invention the tomato juice employed in the process is tomato juice which was prepared from a process which employed a hot break stage. The hot break stage as referred to herein is a stage in which the tomato juice is heated to about 95°C after washing, sorting and crushing the raw tomatoes, in order to deactivate the pectolitic enzymes in the tomato which are responsible for the breakdown the pectin in the tomato. Breaking down of the pectin decreases the viscosity of the tomato juice.

20

According to the present method of controlling the viscosity and lycopene concentration of tomato products, i.e. tomato juice and tomato concentrate, pulp from tomato juice is removed. Controlling the amount of pulp which is separated from the tomato juice allows for the control of the viscosity and lycopene content of the tomato product obtained, which can effect the a/b ratio as tested by Hunter tristimulus colorimeter which indicates the color value of the tomato concentrate. Hence, the viscosity and

30

lycopene content of the tomato product decreases as the amount of pulp removed increases.

It is preferable that not more than 15% of the total pulp be removed from the juice, in order not to deviate from the standards for tomato concentrate and tomato juice, which require a certain Brix, color and viscosity.

According to a further aspect of the present invention the pulp obtained by the present process (hereinafter also referred to as pulp composition), wherein the particle size is not greater than 1.5 mm, preferably 0.8 mm and the lycopene concentration in the pulp (said pulp containing 75% - 92% moisture) which can effect the a/b ratio as tested by Hunter tristimulus colorimeter which indicates the tomato concentrate color value, is between 5 to 15 folds greater than in the tomatoes from which said composition is obtained.. The composition further does not contain any seeds or peels. This is a result of the finishing stage in the process for preparing the tomato juice which is the starting material for the process of the present invention. The finishing stage effectively removes seeds, peels and other particles which are larger than the holes in the finisher's screen. Some pieces of the peels or seeds may pass through the screen, but the amount is so small that for all practical purposes the amounts are negligible. The relatively small particle size of the pulp of the present invention; in comparison, for example, to the pulp obtained according to EP 0 608 027 allows for easier drying of the present pulp, for example by spray drying which is not possible in the case of other types of pulp, e.g. the pulp obtained according to said EP. The drying of the pulp removes above 90% of the water which is part of the serum contained in the pulp. The pulp composition of the present invention after being dried (dried , has a water absorbency capacity greater than that of the pulp obtained by other methods.

In yet a further aspect of the present invention, the composition described herein may be used as a colorant due to its strong red coloring properties. The composition has very little tomato flavor, if any at all. Thus it is particularly suitable for use as a colorant in

food products. It is a safe natural colorant. The dried pulp composition may also be used as a colorant.

According to a further embodiment of the present invention, tomato oleoresin and lycopene may be obtained from the pulp composition of the present invention, for example according to the process described in U.S. 5,837,311. Hence the present invention further provides the use of the pulp composition as starting material for obtaining tomato oleoresin and lycopene.

10 The present invention presents the following advantages:

1. Tomato concentrate or tomato juice, and tomato pulp may be obtained by a single process from the same source of tomato juice.
2. The viscosity and lycopene concentration of tomato concentrate may be controlled in the process, without the need for an external source of pulp or serum. Thus allowing  
15 for better control of the tomato concentrates properties.
3. The properties of industrial tomatoes fluctuate naturally. The tomato paste is an industrial product that is required to have certain values of viscosity and color at stated soluble solids content. The present process gives to the tomato processing industry method to control the process and from variable raw material to produce concentrate or  
20 juice with the required properties.
4. The present process provides an inexpensive source of pulp.
5. The present process provides tomato products with a stronger tomato flavor.
6. Dried pulp with improved water absorbency capacity, weak tomato  
25 flavor and strong red coloring properties.
7. A safe colorant from natural sources which may also have health benefits.

### Examples

30 Example 1: Process for obtaining tomato concentrate - Control

The present Example describes a process in accordance to known industrial processes.

30 ton/hr tomato feed (Brigade variety from BetHashita Farm, 5° Brix and about 10 ppm lycopene) - after washing, sorting, crushing, hot break heating to 95°C and finishing through Rossi & Catelli 0.8 mm screen, is fed to an evaporator. The product obtained after evaporation has a Brix of 30° and a Bostwick value of 5.0. Wherein  
5 Bostwick is a measure of viscosity according to the Bostwick method. The product is diluted to 8° Brix and the flavor are tested as reference. The Lycopene content in the final product is 410 ppm and the a/b value was 2.0 as tested by Hunter tristimulus colorimeter.

10

**Example 2: Process for obtaining tomato pulp and tomato concentrate from tomato juice**

30 ton/hr tomato feed (Brigade variety from BetHashita Farm 5° Brix, 120 ppm lycopene), after washing sorting crushing hot break heating to 95°C and finishing  
15 through Rossi & Catelli 0.8 mm screen, are split into two streams: Stream one, 7 ton/hr is fed to a decanter (centrifugal separator) which separates the tomato juice to 0.8 ton tomato pulp containing 91% moisture. The removal of said pulp may effect the a/b color ratio that correlates with lycopene content and the color of the final tomato concentrate. 6.2 ton/hr serum is then added to stream two.

20

Stream two - 23 ton/hr tomato juice and 6.2 ton/hr serum from stream one is fed to an evaporator. The product of 30° Brix has the same texture as the tomato concentrate described in Example 1 and a Bostwick of 5.5 (measured at a Brix of 12 °) and the color a/ b value =1.98.

25

The tomato concentrate is diluted to 8° Brix, 7° Brix, 6° Brix and tested for tomato flavor compared to the reference from Example 1. The 7° Brix from Example 2 is found to have an equal flavor to the 8° Brix concentrate from Example 1.

30

The pulp is stored at  $(-18)^{\circ}\text{C}$  and then spray dried. 35 ton pulp feed provides 3.3 tons of dry pulp with 4% moisture (96% drying recovery). The dried pulp, also referred to as tomato fibers, is tested for water absorbance capacity which is found to be 1:25.

5    **Example 3: Tomato Concentrate Preparation – Comparative Example**

Stream 1 - 7 ton/hr tomato feed (Brigade variety from BetHashita Farm 5° Brix) - after washing sorting crushing finishing through Rossi & Catelli 0.8 mm screen at ambient temperature and then heating to  $90^{\circ}\text{C}$ , is fed to a decanter which separates the tomato juice to 0.4 ton tomato pulp containing 81% moisture and 6.6 ton/hr serum.

10

Stream 2 - 25 ton/hr tomato feed (Brigade varieties from BetHashita Farm 5° Brix) - after washing sorting crushing hot break heating to  $95^{\circ}\text{C}$  and finishing through Rossi & Catelli 0.8 mm screen, are mixed with the 6.6 ton/hr serum from stream 1, and fed to the tomato evaporator. The tomato concentrate obtained is of 30° Brix having a low viscosity of 9.5 Bostwick. This tomato concentrate is not suitable for the regular tomato concentrate applications.

15

**Example 4: Dried Pulp Composition as Colorant**

2.5 gr of conventional tomato powder containing 0.12% lycopene was added to a 100 gr of yoghurt. 300 mg of dry pulp composition of the present invention (Lycomato Fiber) containing 1% Lycopene, achieved the same color value. The yoghurt to which the tomato powder was added had a pronounced tomato flavor while the sample to which the Lycomato Fiber was added was free from tomato flavor.

25

While embodiments of the invention have been described by way of illustration, it will be apparent that the invention may be carried out with many modifications, variations and adaptations, without departing from its spirit or exceeding the scope of the claims.

CLAIMS

1. An industrial process for obtaining tomato pulp and tomato concentrate from tomato juice, said process comprising of the following steps:

- a) separating the tomato juice to two parts,
- 5       b) one part containing up to 20% of the total tomato juice is separated to pulp and serum,
- c) the serum obtained from step b) is added to the second part of the juice which is further concentrated to obtain tomato concentrate.

10   2. A process according to claim 1 further comprising a step of drying the pulp obtained from step b).

3. A process according to claim 1 wherein up to 15% of the tomato pulp in the is separated.

15

4. A process according to claim 1 wherein the separation of the pulp from the tomato juice is conducted by centrifugation.

5. A method for controlling the viscosity and lycopene concentration of tomato products, tomato concentrate or modified tomato juice, by separating a part of the pulp from the tomato juice from which said tomato products are obtained.

20

6. A method according to claim 5 wherein the viscosity and lycopene concentrate of tomato concentrate is controlled

25

7. A method according to claim 6 wherein the part of the pulp which is separated is separated before concentrating the tomato juice to tomato concentrate.

8. A method according to claim 5 wherein up to 15% of the total tomato

30   pulp is separated.

9. A method according to claim 5 wherein the viscosity and lycopene concentrate of modified tomato juice is controlled.

5 10. A pulp composition comprising of tomato pulp wherein the particle size is not greater than 2.5mm which does not contain seeds or peels from the tomato and has a lycopene concentration which is 5 to 15 folds higher than the lycopene concentration in the tomatoes from which said pulp is obtained.

10 11. A composition according to claim 10 wherein said pulp is dried.

12. A composition according to claim 11 wherein said composition has a water absorbency capacity ratio of dried pulp:water of 1:13 to 1:25.

15 13. A composition according to claim 10 wherein the particle size is not greater than 1.5 mm.


14. Use of the composition of claim 10 as a colorant.


20 15. Use of the composition of claim 11 as a colorant.

16. Use of a composition of claims 10 or 11 as starting material for obtaining tomato oleoresin and lycopene.

For the Applicants  
Noam Mushkin

By:



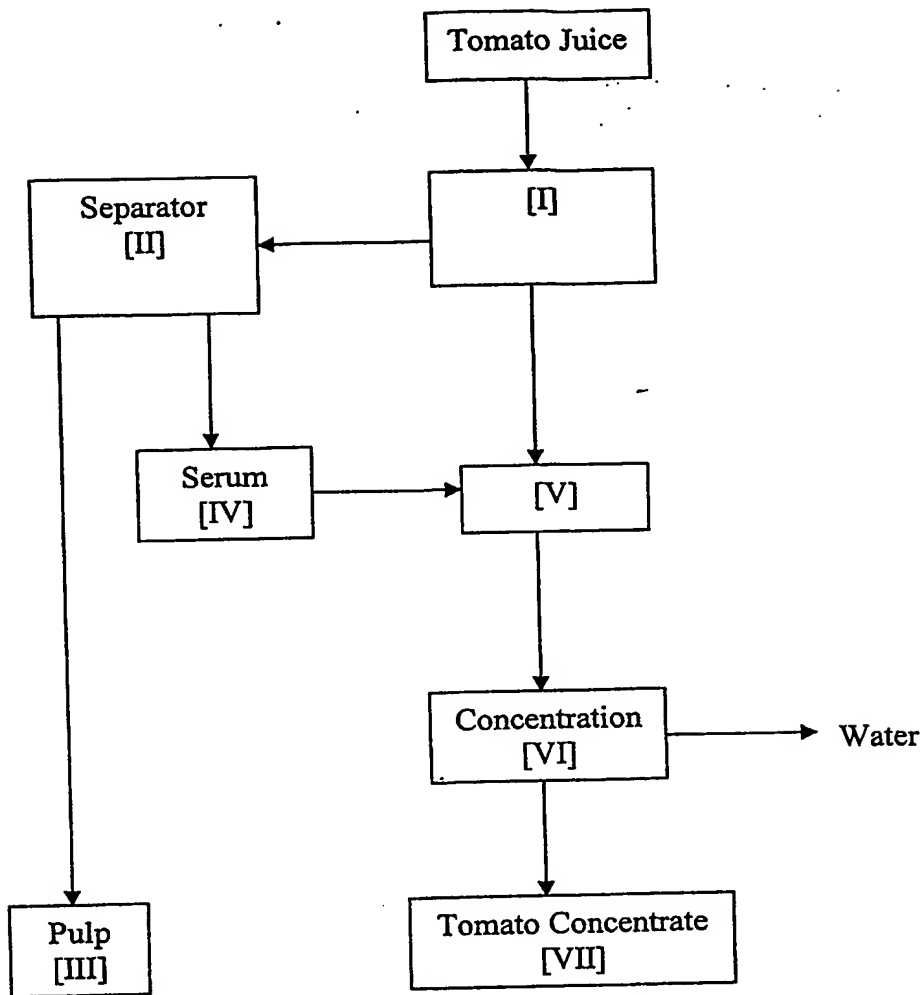

**Fig. 1**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**